

特性:


- 用于时序控制的时间继电器
- 备有板前、板后的连接插座
- LED 再线指示灯，显示动作状态



ZQ3Y(H3Y)

ZQ3Y

ZQ3Y - 2 10S AC220V

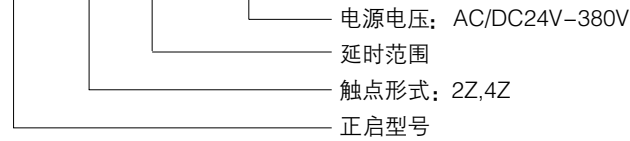

性能参数

电源电压	DC12V-48V AC12V-380V50HZ/60HZ
功耗	DC1.0W AC1.0VA
控制输出	2Z 5A220VAC 4Z 3A220VAC
绝缘电阻	DC500V 100MΩ
介质耐压	BCC1500VAC BOC1000VAC
环境温度	-10℃~50℃
湿度	35%~85%
寿命	机械寿命:10 ⁷ 电气寿命:10 ⁵
重量	≈ 50g

时间范围

额定时间	时间设置范围	额定时间	时间设置范围
1s	0.1S~1S	3m	0.1m~3m
5s	0.2S~5S	5m	0.2m~5m
10s	0.5S~10S	10m	0.5m~10m
30s	1.0S~30S	30m	1m~30m
60s	2.0S~60S	60m	2m~60m

外形图、接线图、安装尺寸、延时波形

